


## Electrical connections

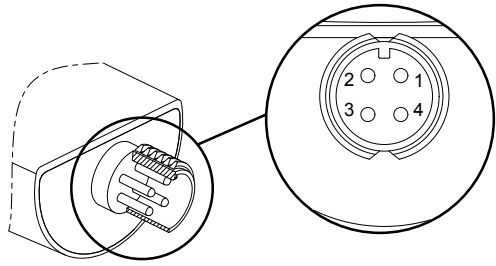

TM06 1070 1514

**Fig. 72** Electrical connections

### DPI II

Signal condition: 2-wire (loop-powered)

Pin	1	2	3	4
Wire colour	Brown	White	Blue	Black
I/O	Power supply	Not used	Pressure signal 4-20 mA	Not used

### DPI II+T

Signal condition: 4-wire

Pin	1	2	3	4
Wire colour	Brown	White	Blue	Black
I/O	Power supply	Pressure signal 0-10 V	GND*	Temperature signal 0-10 V

\* Common ground for pressure and temperature signals. Power supply, screened cable: SELV or PELV.