


## Electrical connections

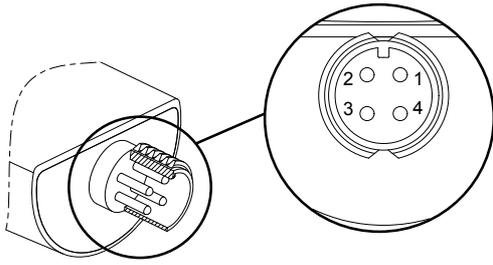

TM06 1070 1514

**Fig. 6** Electrical connections

### VFI Signal condition: 2-wire, loop-powered.

Pin	1	2	3	4
Wire colour	Brown	White	Blue	Black
I/O	Power supply	Not used	Flow signal 4-20 mA	Not used

Power supply: 12.5 - 30 V, screened cable.

### VFI+T Signal condition: 4-wire

Pin	1	2	3	4
Wire colour	Brown	White	Blue	Black
I/O	Power supply	Flow signal 0-10 V	GND*	Temperature signal 0-10 V

\* Common ground for pressure and temperature signals.  
Power supply, screened cable: SELV or PELV.